


8025-7

80 x 80 x 25mm (3.15 x 3.15 x 0.98in)

DC Fans

www.pelonistech.com



FRAME: Thermoplastic, PBT (30%), UL94-V0
IMPELLER: Thermoplastic PBT (GF 15%), UL94-V0
BEARING SYSTEM: Ball Bearing or Sleeve Bearing
OPERATING LIFE: Ball: 50,000 hrs; Sleeve: 30,000 hrs
OPERATING TEMP: -10°C to +70°C @35-85% RH

LEAD WIRE: UL 1007, AWG 24/260mm, Red(+), Black(-)
PROTECTION: Locked rotor protected for minimum 72 hours



STANDARD SERIES


- RoHS
- UL
- cUL
- CE

Available Features															
1a	1b	1c	2a	2b	2c	2d	3	4	5a	5b	6	7	8a	8b	8c
IR	AS	MS	FG	RD	Rdb	LD	SG/PWM	OV	TPWM	RPWM	CL	CS	VPWM	IPWM	PPWM
	●		●	●	●										


To add a desired feature to a fan, replace the Part Number suffix "x" with the available feature listed. (e.g. to add feature "2a" to fan Part Number C8025H12BPLBx-7, change the Part Number to C8025H12BPLB2a-7).

Part Number	Voltage (VDC)	Current (A)	Power (Watts)	Speed (RPM)	Air Flow (Q)		Pressure (P)		Noise (dBA)	Unit Weight (QTY/CTN)
					(CFM)	(m³/min)	(mmAq)	(in H ₂ O)		
C8025X12BPLBx-7	12 (07~14)	0.202	2.42	3600	43.49	1.232	4.94	0.195	37.85	83g (135pcs)
C8025H12BPLBx-7		0.129	1.55	3000	36.26	1.027	3.46	0.136	32.11	
C8025M12BPLBx-7		0.098	1.18	2600	31.64	0.896	2.61	0.103	28.56	
C8025L12BPLBx-7		0.062	0.74	2200	26.63	0.754	1.87	0.074	23.79	
C8025X24BPLBx-7	24 (15~27)	0.105	2.53	3600	43.49	1.232	4.94	0.195	37.85	83g (135pcs)
C8025H24BPLBx-7		0.067	1.60	3000	36.26	1.027	3.46	0.136	32.11	
C8025M24BPLBx-7		0.053	1.27	2600	31.64	0.896	2.61	0.103	28.56	
C8025L24BPLBx-7		0.042	1.01	2200	26.63	0.754	1.87	0.074	23.79	

PERFORMANCE CURVES

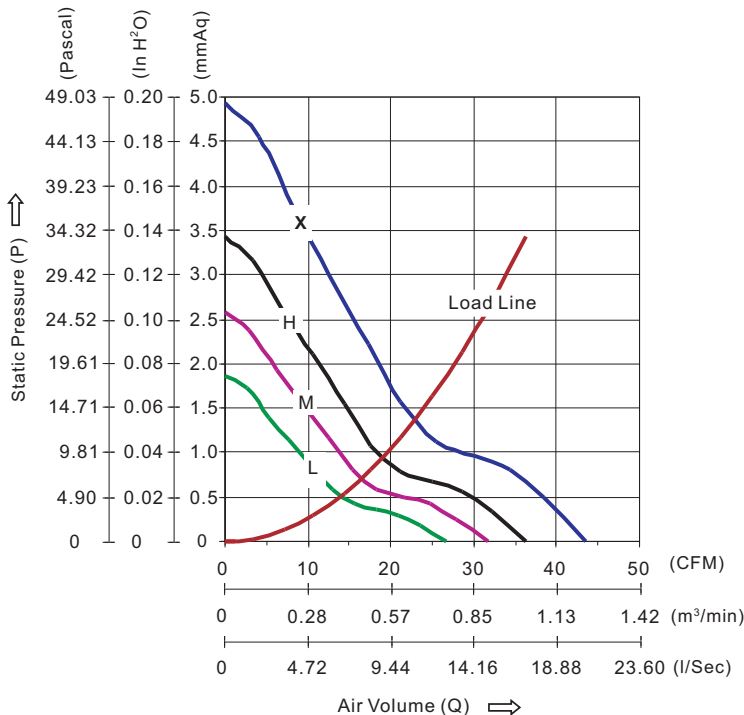

DIMENSIONAL DRAWING

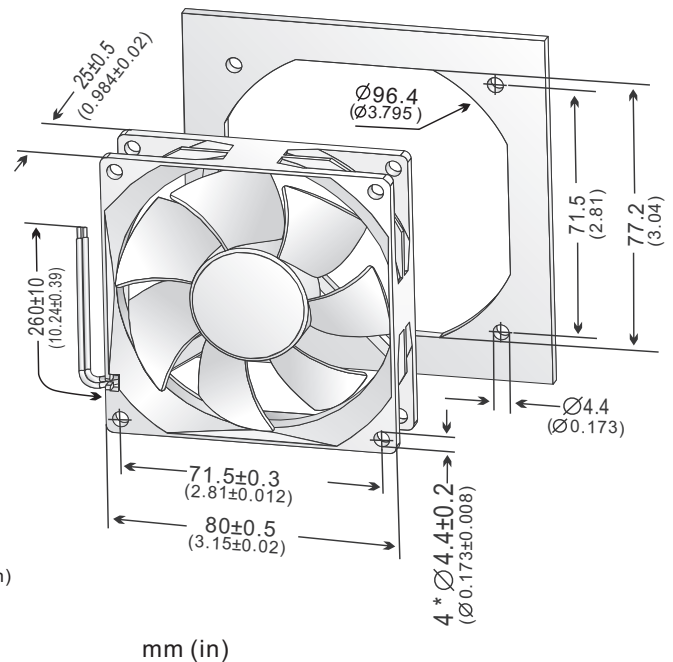

8025-7

- All fans listed refer to double ball bearing fans; sleeve bearing fans may consume about 10% more power for the same speed.
- Noise measurements are taken with a background noise of 16.8 dBA.
- Please see "Available Features Index" for a summary explanation of each feature
- Specifications are subject to change without notice.



sales@pelonistech.com • T888.546.0524 • F610.647.0319