

JH250 Inline Duct Fan

250mm (9.8in)



GENERAL SPECIFICATIONS



Impeller: PA66+25%GF

Housing: SGCD2

Life: 30,000 hours

IP Rating: IP44

Operating Temp: -40°C~+80°C

Wire: 20 AWG

FEATURES

High efficiency inlet design

Whisper-quiet performance


Lubricated sealed ball bearings

External rotor motor w/backward-curved centrifugal fan


Includes housing, impeller, motor, base, and ABS connection box

MODEL	VOLTAGE (V)	FREQ (Hz)	CURRENT (A)	POWER (W)	SPEED (RPM)	AIR FLOW (m ³ /h)	AIR FLOW (CFM)	PRESSURE (Pa)	NOISE (dBA)	INSULATION CLASS
JH250A	240	50	0.45	156	2565	980	577	595	50	F
JH250B	240	50	0.66	175	2435	1115	656	572	50	F


Performance Curves

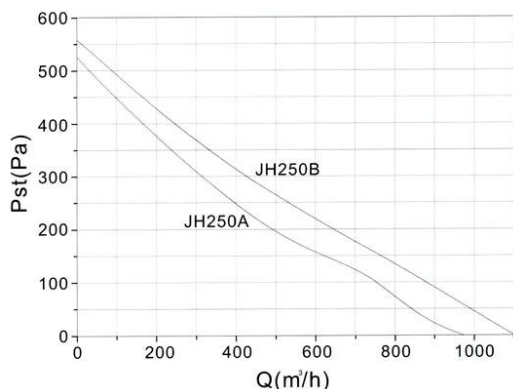

Dimensions



Wiring Diagram

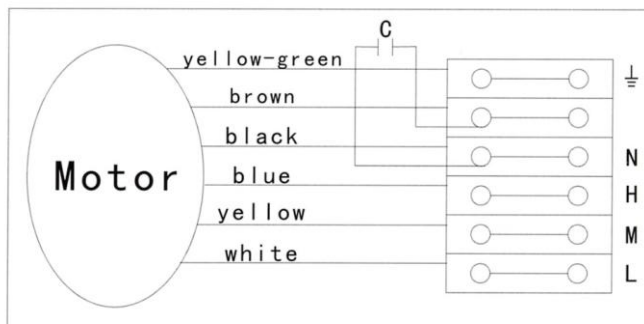

	A	B	C	D	E	F
JH250A/B	250	333	210	28.6	28.5	42

Note: All dimensions in mm

Applications

Commercial and industrial applications, condominiums, apartments, hospitals, hotels, and other areas with limited space.



T 1.888.546.0524 • F 1.610.647.0319
email: sales@pelonistech.com • www.pelonistechnologies.com

