EVERLINE®
UAV PROPULSION MOTORS
EV4200 SERIES

EV4215-380

PROPELLER PERFORMANCE TEST

11 × 7.5 × 3 | 6S

PTI PELONIS TECHNOLOGIES

DIMENSIONAL DRAWING

All dimensions in millimeters

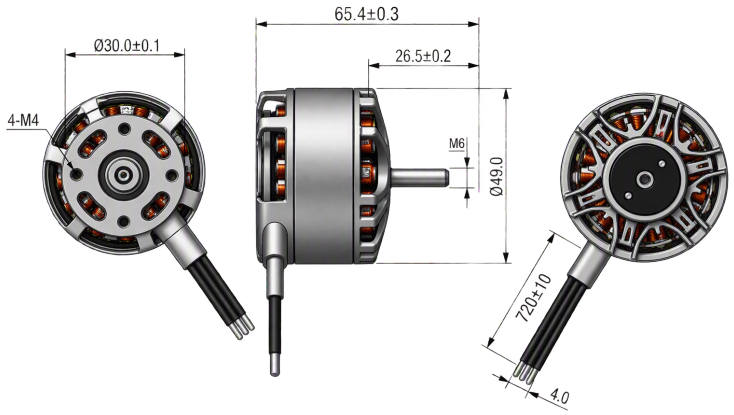

GENERAL SPECIFICATIONS

MOTOR

Stator Size:	4215
KV Rating:	380 KV
Configuration:	12N14P
Dimensions:	49 × 65 mm
Weight:	175 g
Shaft Diameter:	6 mm
Lead-Wire Length:	750 mm
Wire Gauge:	14 AWG (2.5 mm²)

ELECTRICAL

Test Battery Configuration:	6S LiPo
Maximum Rated Speed:	12,340 RPM
Maximum Tested Speed:	8,057 RPM
Idle Current (20 V):	1.4 A
Peak Current:	51 A
Winding Resistance:	66 mΩ

PROPELLER PERFORMANCE DATA

PROPELLER: 11 × 7.5 × 3 | BATTERY: 6S LiPo

Throttle (%)	Voltage (V)	Current (A)	Speed (RPM)	Thrust (g)	Input Power (W)	Efficiency (g/W)
10	25.22	0.12	771	15	3.0	4.96
20	25.22	0.38	1,629	69	9.6	7.20
30	25.19	0.82	2,486	161	20.7	7.79
40	25.15	1.46	3,257	305	36.7	8.31
50	25.10	2.49	4,114	489	62.5	7.82
60	25.01	3.88	4,886	724	97.0	7.46
70	24.90	6.03	5,657	990	150.1	6.59
80	24.73	8.33	6,514	1,277	206.0	6.20
90	24.53	11.48	7,200	1,605	281.6	5.70
100	24.32	15.50	8,057	1,980	377.0	5.25

NORMALIZED TEST PERFORMANCE CURVES

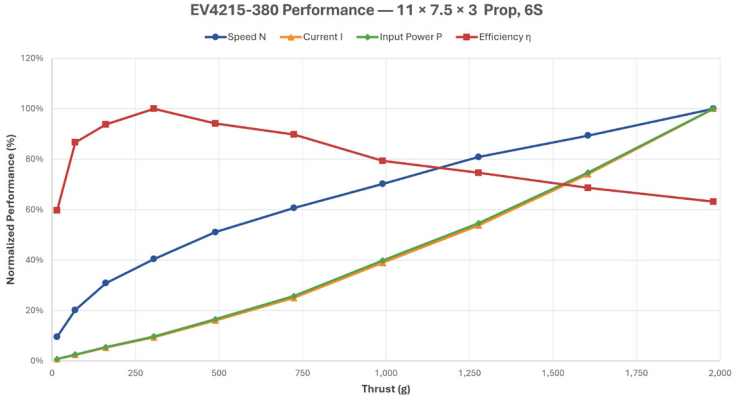

CURVE INTERPRETATION

Curves are normalized representations of measured test data for visual comparison. Refer to the performance table for actual measured values.

ENGINEERING NOTES

Performance data is based on the bench-test conditions.

Actual performance may vary with installation, airflow, battery condition, ESC setup, and propeller variation.

Validate final selections using application-specific testing.

CONTACT

Product and application assistance:

SALES@PELONISTECH.COM

PELONISTECHNOLOGIES.COM